

FAS Ultra S

3FF

High Pressure Fire Attack System Petrol Engine

DESCRIPTION

- Compact and lightweight **portable** system
- Working pressure up to 185 Bars – 2800 psi –
- Can be installed with our water tank or vehicle tank
- 4 Ergonomic handles to lift from all sides
- Stainless steel frames for longevity
- Easy training, intuitive use
- Discharge: 1 hose reel x 60 m, equipped with twin lance for jet/spray / low/high pressure / foam
- Fast Connection type Safety Lock Guyson Fitting
- Water connection type Storz


OPERATING CONTROLS

Controls are easy to operate and include:

- Engine electric key start / stop
- Automatic throttle control
- Hour meter, Tachometer
- Pump pressure gauge
- Emergency Stop

SPECIFICATIONS & WARRANTY

Body and frame	Stainless Steel Grade 304 Powder coated RED
Pump	Speck triplex pump, with Brass head and Ceramic pistons
Flow rate	19 l/mn – 5 GPM
Maximum pressure	185 Bars - 2800 psi
Engine	13 HP – 8.2 Kw Honda – 4 strokes
Petrol Tank	Integral 6 liters 1.5 hour runtime at maximum speed
Battery	12V -30A/h Dry-cell sealed, 12 months load
Starter	12 volt electric key or Manual recoil
Hose	1 hose reel, length 60 m
Weight	108 Kg
Dimensions	LxWxH 99x61x60
Guarantee	1 Year

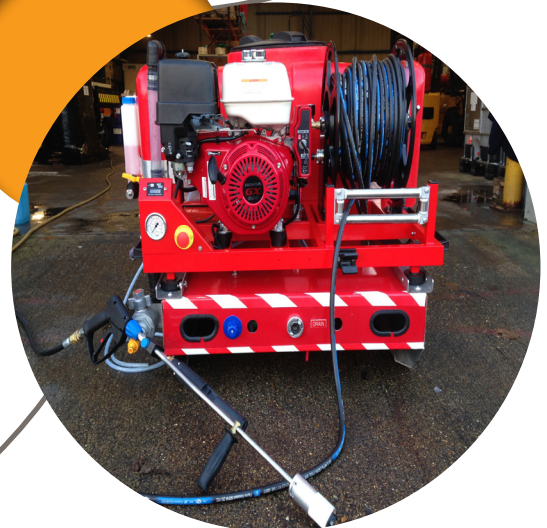

Tel. +44 (0) 1536 202919 • Fax +44 (0) 1536 263641 • sales@3fff.co.uk

Unit B, 18 Brunel Road, Earlstree Industrial Estate,
Corby, Northants, NN17 4JW, United Kingdom

V.A.T. Registration No: 938 9418 70 • Registered in England: 06236589

No: FM 560021

www.3fff.co.uk