



FATSEAL



Class F Extinguisher Additive

● PERFORMANCE & WARRANTY

FATSEAL meets EN3 European standard as a Class A-B-F water additive.

FATSEAL is a high performance multi purpose product that can be used at a concentration of 50% by volume with clean tap water for Class F rating. At this concentration, it can be used for both A and B ratings.

FATSEAL has a 10 years warranty in its original packaging and at storage temperatures 0°C / +60°C.


FATSEAL has a 5 years warranty as a premix solution, contained and sealed in a lined extinguisher unit or fire suppression system.

● PHYSICAL DATA

Appearance / colour	Red Liquid
Concentration of use	50 %
Specific Gravity at 20°C (Kg/dm3)	1.04
Viscosity at 20°C (cStokes)	10
Freezing point	-15°C
Ph at 20°C	8
Sediments after ageing	< 0.1 %
Surface tension at 50% (mN/m)	17

● EXTINGUISHER – TYPICAL RATING:

2 Litre	8A – 34B – 25F
3 Litre	13A – 70B – 40F
6 Litre	21A – 113B – 75F

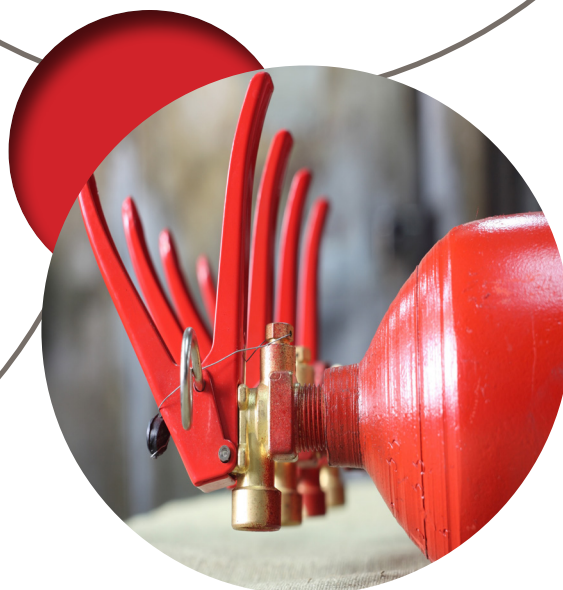

Tel. +44 (0) 1536 202919 • Fax +44 (0) 1536 263641 • sales@3fff.co.uk

Unit B, 18 Brunel Road, Earlstree Industrial Estate,
Corby, Northants, NN17 4JW, United Kingdom

V.A.T. Registration No: 938 9418 70 • Registered in England: 06236589

No: FM 560021

www.3fff.co.uk