



GENEX B/R



Fluorosynthetic Foam AFFF

● PERFORMANCE & WARRANTY

GENEX B/R meets international requirements
EN 1568-3
ISO 7203-1
EN3

GENEX B/R contains corrosion inhibitors.

GENEX B/R is designed to work effectively in extinguishers
for B rating.

GENEX B/R can be combined with PENTSPRAY to better the
rating on A fires.

GENEX B/R can be freeze protected with FREEZOL to protect up
to -30°C.

● EXTINGUISHER - Typical ratings:

6 Litre	13A/21A/27A	144B/183B
9 Litre	27A/34A/43A	183B/233B


GENEX B/R has a 5 years warranty in its original packaging and at
storage temperatures -30°C/+60°C.

● PHYSICAL DATA

	GENEX B/R	
	1B	1R
Appearance liquid / Colour	Red	Orange
Concentration of use	1 - 3%	10 - 17%
Specific Gravity at 20°C (Kg/dm ³)	1.04	1.08
Viscosity at 20°C (cStokes)	12	5
Freezing point	-22°C	-12°C
Ph at 20°C	8	
Sediment after ageing	<0.1%	
Surface tension (mN/m)	16	17
Interfacial tension (mN/m)	3	2

● FOAM QUALITY

Low Expansion	8	10
Drainage time 25% / 50%	2 min/4 min	4 min/ 8 min

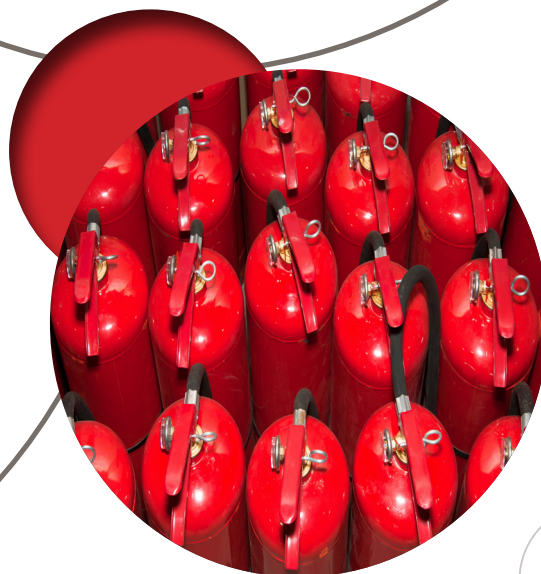

No: FM 560021

Tel. +44 (0) 1536 202919 • Fax +44 (0) 1536 263641 • sales@3fff.co.uk

Unit B, 18 Brunel Road, Earlstree Industrial Estate,
Corby, Northants, NN17 4JW, United Kingdom

V.A.T. Registration No: 938 9418 70 • Registered in England: 06236589

www.3fff.co.uk