

# CARPOK 150

# 3F

## Mobile Foam Unit

### DESCRIPTION

- **Tank Capacity** 150 L / 40 Gal
- **Tank Material** Polyethylene
- **Frame Finish** Aluminium alloy NITUFF treated  
50 µm PTFE coated with epoxy
- **Wheels** 4 x Rubber
- **Inductor** 60 GPM, adjustable at 1%, 3% and 6%
- **Pick up tube** Clear reinforced PVC
- **Hose** Rubberized 15 m / 50 feet
- **Weight** 61 Kg / 135 lbs
- **Dimensions** 81 x 66 x 107 cm / 32"x 26"x 42"

### SPECIFICATIONS & GUARANTEE

CARPOK is a mobile foam unit designed to be resistant and light for easy handling and use.

Its new tank is made of hard resistant yellow Polyethylene to withstand extreme resistance to weather and contact with general chemicals.

The frame is made of High Grade aluminium alloy with patented NITUFF finish giving 50 µm PTFE impregnated anodised treatment; fully covered in a red epoxy glossy finish.

The rubberized wheels are designed 2+2 for easy movement and high stability.


The foam Inductor is ergonomically mounted with a metering valve providing accurate induction at 1%, 3% and 6% and fitted with a clear reinforced PVC pick-up tube.

CARPOK is equipped with a rubber-type hose.

CARPOK is offered with newly designed low expansion or medium expansion nozzles.

Our mobile unit is ready-to-use product designed for autonomous operations. You only need to connect water to the CARPOK water inlet at a pressure between 5 to 7 Bars – 80 to 100 psi : CARPOK ideal operating conditions

CARPOK warranty is 1 year.

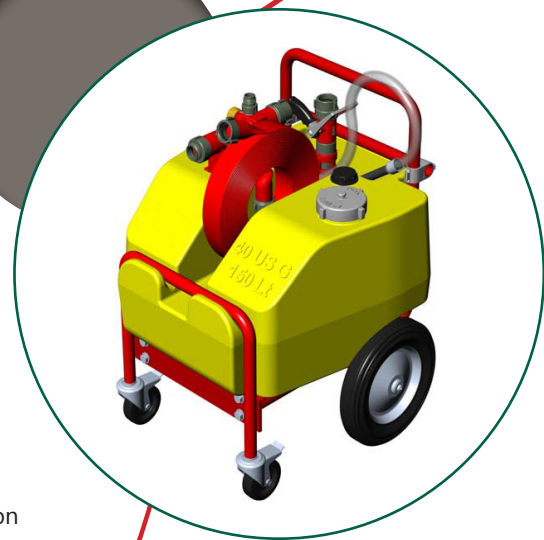

No: FM 560021

Tel. +44 (0) 1536 202919 • Fax +44 (0) 1536 263641 • sales@3fff.co.uk

Unit B, 18 Brunel Road, Earlstree Industrial Estate,  
Corby, Northants, NN17 4JW, United Kingdom

V.A.T. Registration No: 938 9418 70 • Registered in England: 06236589

[www.3fff.co.uk](http://www.3fff.co.uk)