



CF3

3F

Concrete Plasticiser Fluorine Free

● PHYSICAL DATA

Appearance / Colour	Yellow liquid
Concentration of use	3%
Specific Gravity at 20°C (Kg/dm3)	1.01
Ph at 20°C	7
Viscosity at 20°C (cStokes)	5
Freezing point	-8°C
Sediment after ageing	<0.1%
Surface tension at 3% (mN/m)	22


● PERFORMANCE & WARRANTY

CF3 is a new generation alkyl ether sulphate that provides unique foaming properties in the manufacture of light aerated concrete.

CF3 must be used only with soft or hard water.

The benefits of using CF3 are to increase the volume of the concrete. The concrete becomes lighter and can be used to fill empty structure and space. This proves to be cost-efficient when it comes to lower building costs.

CF3 has a 5 years warranty in its original packaging and at storage temperatures 0°C / +60°C.

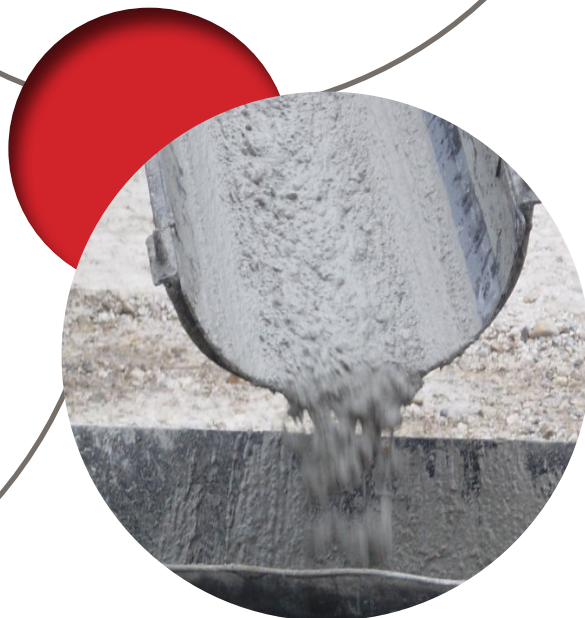

Tel. +44 (0) 1536 202919 • Fax +44 (0) 1536 263641 • sales@3fff.co.uk

Unit B, 18 Brunel Road, Earlstree Industrial Estate,
Corby, Northants, NN17 4JW, United Kingdom

V.A.T. Registration No: 938 9418 70 • Registered in England: 06236589

No: FM 560021

www.3fff.co.uk