


## Kitchen Extinguishing System

### DESCRIPTION

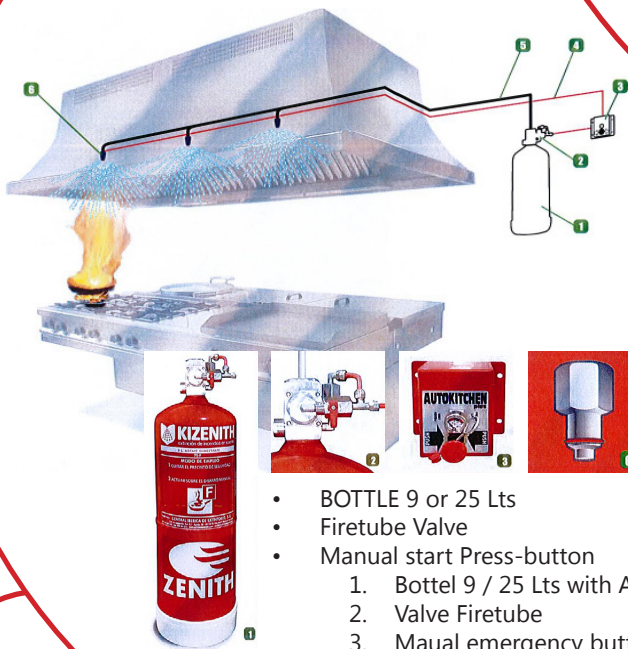

- BOTTLE 9 or 25 Lts
- Firetube Valve
- Manual start Press-button
  1. Bottel 9 / 25 Lts with Agent Class K for kitchen fires
  2. Valve Firetube
  3. Maual emergency button
  4. Cable Firetube 141°C
  5. Piping Stainless Steel
  6. Diffuser

### APPLICATION


In case of fire, it automatically releases the pressure in the tube, until the valve of the bottle opens to liberate the extinguishing agent. As a result, the fire-fighting agent is applied onto the critical points in the hood, thanks to the special diffusers.

### BENEFITS

- Automatic and/or manual start.
- Easy installation and maintenance.
- No electricity required
- Fast detection in all the hood.
- Extinction under and around the hood.
- Easy to fix and connect in the hood.
- Sensitivity to heat and to flames.
- Long-span life.

### CHARACTERISTICS

- Automatic extinction
- No pressure in the tubes
- Extinguishing liquid certified on Class F (oil and grease)
- No toxicity for food/drinks.
- CE Marking 2014/68/UE
- Breaking temperature for the thermo cable at 141°C

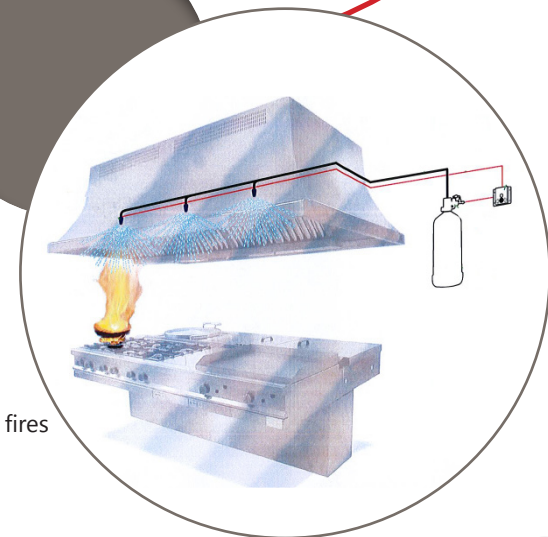

Tel. +44 (0) 1536 202919 • Fax +44 (0) 1536 263641 • sales@3fff.co.uk

Unit B, 18 Brunel Road, Earlstree Industrial Estate,  
Corby, Northants, NN17 4JW, United Kingdom

V.A.T. Registration No: 938 9418 70 • Registered in England: 06236589

[www.3fff.co.uk](http://www.3fff.co.uk)