

VARIOUS COUPLINGS, FLANGES AND BASKETS

VARIOS ACOPLEROS Y BRIDAS



► EXPRESS COUPLINGS
ACOPLES EXPRESS



► BARCELONA COUPLINGS
ACOPLES BARCELONA



► GFR COUPLINGS, BSP
AND ADAPTATOR RINGS
ACOPLES GFR, BSP
Y PIEZAS INTERMEDIARIAS




► API COUPLINGS
ACOPLES API




► VISUALISERS
VISORES




► VENTILATION COUPLINGS
RACORES VENTILACION

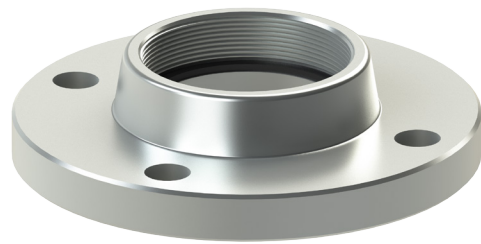

► FLANGES
BRIDAS

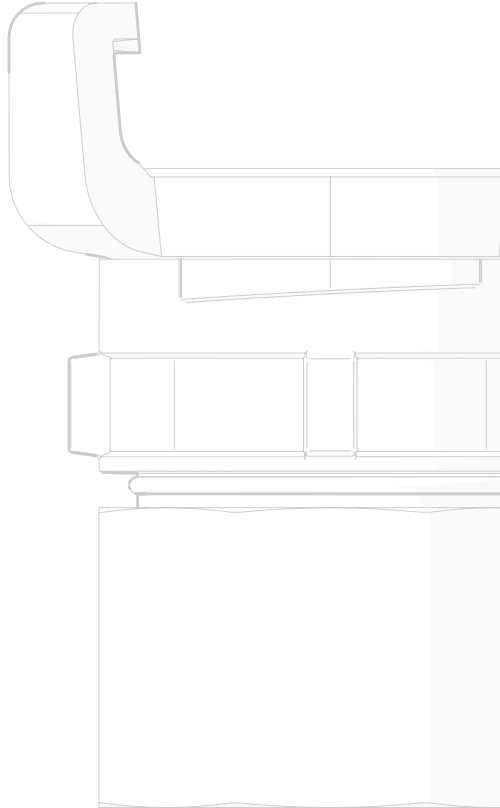

COUPLINGS
ACOPLES

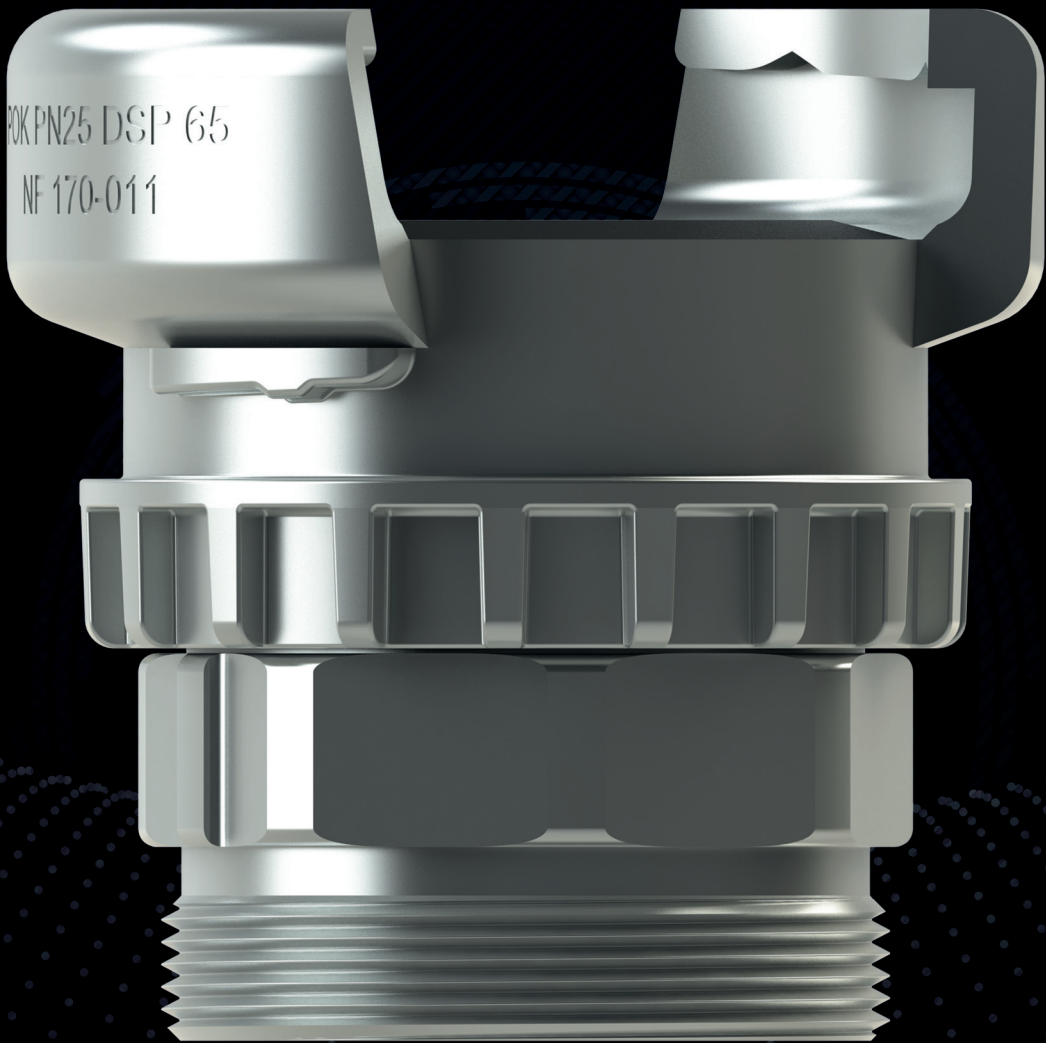

POK SAS

ZI les Guignons - 10400 Nogent-sur-Seine - FRANCE

Tél. : +33 (0)3 25 39 84 78 - Fax : +33 (0)3 25 39 84 00

info@pok.fr

export@pok.fr

www.pok.fr



Visitez notre chaîne
On our channel


YouTube



WE CREATE WITH PASSION / CREAMOS CON PASIÓN




French manufacturing, conform to the norms, certified, available in aluminium alloy, stainless steel, bronze and polypropylene.
Fabricación Francés, de conformidad con las normas, certificados, disponibles en aleación de aluminio, acero inoxidable, bronce y polipropileno.

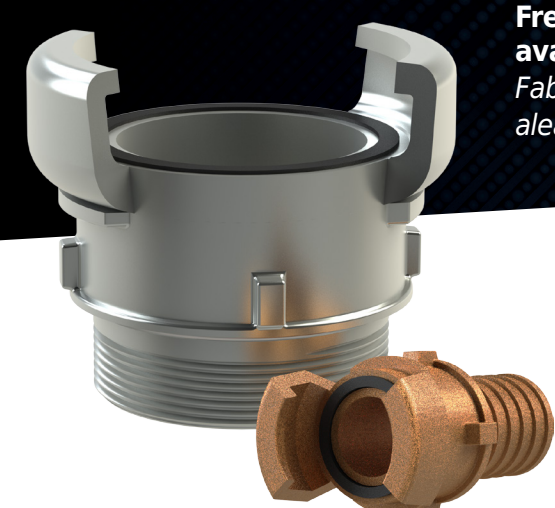

SYMMETRIC GUILLEMIN COUPLINGS
ACOPLE GUILLEMIN

- ▶ Dimensions: from DN15 to DN150 - ½" to 6" / *Diametro: De DN15 a DN150*
- ▶ Nominal pressure: from PN6 to PN20 / *Presión nominal: PN6 a PN20*
- ▶ Material : aluminium alloy, stainless steel, bronze and polypropylene
Materiales: aleación de aluminio, acero inoxidable, bronce y polipropileno
- ▶ With multi-serrated hose shank, double ribbed hose shank, helicoidal hose shank, welding shank, male of female thread
Con mangas entalladas, onduladas, helicoidal, para soldadura, roscado macho o hembra


Suivant normes
NF E 03-005
NF S 61-701 - NF S 61-703
ISO R228 - NF T 81-101
In compliance with norms



DSP-AR COUPLINGS
ACOPLES DSP-AR

- ▶ Certified with marking / *Certificados grabados*
- ▶ Dimensions: from DN40 to DN100 - 1½" a 4" / *Dimensiones: entre DN40 y DN100*
- ▶ Nominal pressure: PN25 / *Presión nominal: PN25*
- ▶ Material: aluminium alloy and bronze / *Materiales: aleación de aluminio y bronce*
- ▶ With multi-serrated hose shank, double ribbed hose shank, male of female thread
De tubos entallados, acanalados, con rosca macho o hembra


Suivant normes
NF E 03-005
NF S 61-701 - NF E 29-572
ISO R228 - DIN 259
In compliance with norms



STORZ COUPLINGS
ACOPLES STORZ

- ▶ Dimensions: from DN25 to DN250 - 1" to 10"
Dimensiones: desde DN25 hasta DN250
- ▶ Nominal pressure: PN16 / *Presión nominal: PN16*
- ▶ Material: aluminium alloy, bronze and brass
Materiales: aleación de aluminio, bronce y latón
- ▶ With multi-serrated hose shank, double ribbed hose shank, male of female thread
Con tubos entallados, acanalados, con rosca macho o hembra

Suivant normes
DIN
NF E 03-005
NFPA 1963 - GB 125 14.2
ISO R228 - DIN 259
NEN 3374
In compliance with norms




Suivant norme
NF E 03-005
ISO R228 - DIN 259
BS 336
In compliance with norm




 INSTANTANEOUS & BSRT COUPLINGS
ACOPLES INSTANTÁNEOUS & BSRT

- Dimensions: from 1½" to 6" / *Dimensiones: de 1½" a 6"* ◀
- Nominal pressure: PN16 / *Presión nominal: PN16* ◀
- Material: aluminium alloy and bronze
Material: aleación de aluminio y bronce
- With male or female thread
Con tubos con rosca macho o hembra ◀

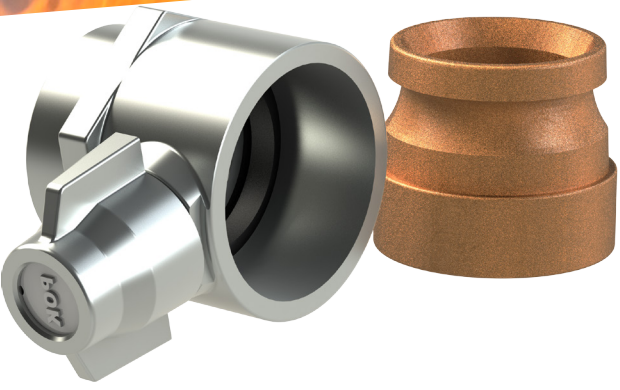


Suivant normes
NF E 03-005
ISO R228 - DIN 259
NFPA 1963
In compliance with norms




 NST-NH COUPLINGS
ACOPLES NST-NH

- Dimensions: from 1" to 6" / *Dimensiones: de 1" a 6"* ◀
- Nominal pressure: PN16 / *Presión nominal: PN16* ◀
- Material: aluminium alloy and bronze
Materiales: aleación de aluminio y bronce
- With male or female thread
Con rosca macho o hembra ◀

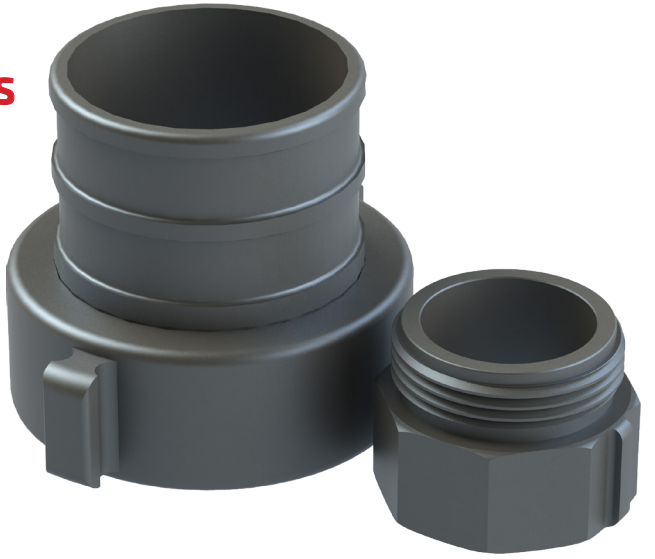


Suivant normes
JIS B 9911.1968
ISO R228 - DIN 259
NF E 03-005
In compliance with norms




 MACHINO COUPLINGS
ACOPLES MACHINO

- Dimensions: from DN65 to DN80 ◀
- Dimensiones: DN65 o DN80*
- Nominal pressure: PN16 ◀
- Presión nominal: PN16*
- Material: aluminium alloy ◀
- Material: Aleación de aluminio
- Male or female thread couplings ◀
- Con roscas macho o hembraz*

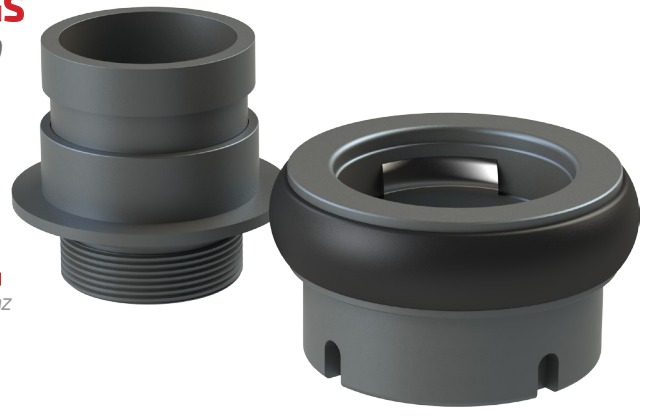

Suivant normes
NF E 03-005
ISO R228 - DIN 259
GOST 28352-89
In compliance with norms



 GOST COUPLINGS
ACOPLES GOST

- Dimensions: from DN25 to DN150 - 1" to 6" ◀
- Dimensiones: DN25 a DN150 - 1" a 6"*
- Nominal pressure: PN16 ◀
- Presión nominal: PN16*
- Material: aluminium alloy, bronze and brass ◀
- Materiales: aleación de aluminio, bronce y latón*
- With multi-serrated hose shank, male of female thread ◀
- Con tubos dentados y rosca macho o hembra*



RCS : TROYES 90 B 276 - SAS with share capital of 1.000.000 EUR - Photos credits: POK SAS - Non-contractual pictures
Warning: POK reserves the right to prosecute anyone producing or selling POK counterfeits as well as using the POK brand without written authorization. Damages will be claimed against every offender, at least at the level of the damage suffered, by way of court.

RCS : TROYES 90 B 276 - SAS con capital de 1.000.000 EUR - Fotos POK SAS - Fotos sin base en un compromiso
Advertencia: POK se reserva el derecho para procesar a toda sociedad fabricando y/o comercializando imitaciones de productos POK y/o utilizando la marca POK sin autorización escrita previa de su parte. Daños y perjuicios con respecto a todo contraventor, por lo menos al al nivel del perjuicio súbito, serán reclamados por vía de justicia.