



## "HANDY-FOAM" portable foam unit


Portable unit  
Great autonomy  
of the fireman  
Easy carrying  
Many options

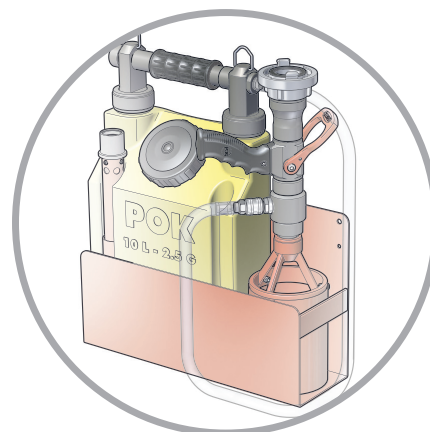


"Handy-foam" with carrier in aluminium alloy, equipped with a low and medium foam expansion branchpipe

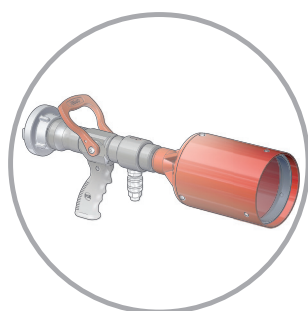

Self-educing foam branchpipe  
medium expansion of 75 lpm

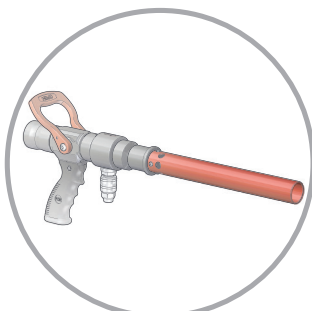

Self-educing foam branchpipe  
low expansion of 75 lpm

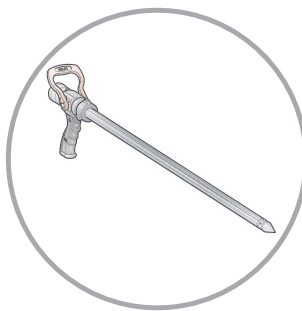

Belier piercing nozzle of 75 lpm


**Maximum working pressure:** PN16  
**Material:** aluminium alloy and polyethylene  
**Surface treatment:** polyester coating and hard anodisation  
**Valve type:** ball valve  
**Expansion:** approx. x10 or x70  
**Suction percentage:** 0,4, 1, 3 or 6%

**Handle colour:**

The "HANDY FOAM" portable foam unit is made of a resevoir in polyethylene with 10 liters capacity and carrying shoulder straps to facilitate the carrying.

It comes with low and medium expansion foam branchpipes that can be connected to the nozzle and exchanged depending on the use, and allowing possible percentages of foam concentrate thanks to calibrated orifices of 0.4, 1, 3 and 6%.

Various options are possible: self-educing low expansion foam branchpipe of 75 lpm, self-educing medium expansion foam branchpipe of 75 lpm, self-educing low expansion foam branchpipe of 200 lpm, Belier piercing nozzle of 75 lpm, shutoff, low expansion foam head, medium expansion foam head, nozzle tip of 75 lpm, reservoir, pick-up tube, carrier, extra metering orifices.

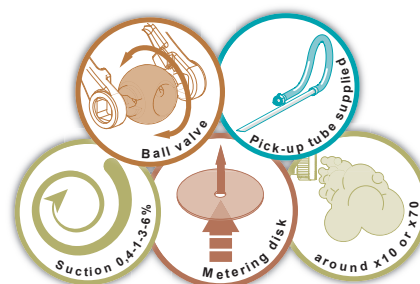

Description	Capacity (liter)	Flow rate (lpm)	Inlet	Dimensions (mm)	Weight (kg)	Ref.
Portable foam unit with low and medium expansion foam branchpipes and carrying shoulder straps	10	75			5,90	<b>08997</b>
Portable foam unit with low and medium expansion foam branchpipes and harness	20	75			6,20	<b>25098</b>
Self-educing low expansion foam branchpipe		75	1" BSP female	952 x 95 x 236	1,91	<b>09960</b>
Self-educing medium expansion foam branchpipe		75	1" BSP female	500 x 134 x 236	2,67	<b>08998</b>
Self-educing low expansion foam branchpipe		200	1.5" NST-NH female	648 x 95 x 236	1,80	<b>09961</b>
Belier piercing nozzle		75	1" NST-NH female	1099 x Ø64	1,88	<b>12789</b>
Shutoff valve with self-educing system		75	1" NST-NH female	247 x 95 x 236	1,45	<b>12678</b>
Low expansion foam head		60	1" NST-NH female	363 x Ø50	0,40	<b>12669</b>
Medium expansion foam head		60	1" NST-NH female	266 x Ø134	1,22	<b>12405</b>
Nozzle tip		75	1" NST-NH female	100 x Ø50	0,27	<b>12749</b>
Reservoir with pick-up tube, filter and straps	10					<b>08999</b>
Pick-up tube of 3 meters length						<b>12791</b>
Aluminium alloy support				493 x 133 x 303	1,12	<b>11716</b>
Metering orifices (precise the flow rate and percentage when ordering)				35 x Ø30	0,03	<b>09823</b>